
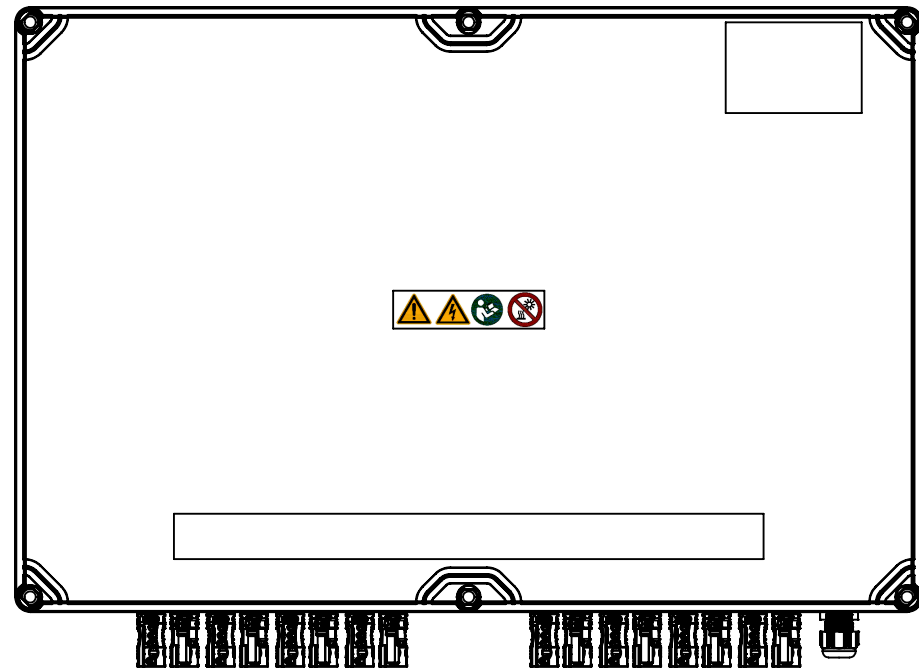
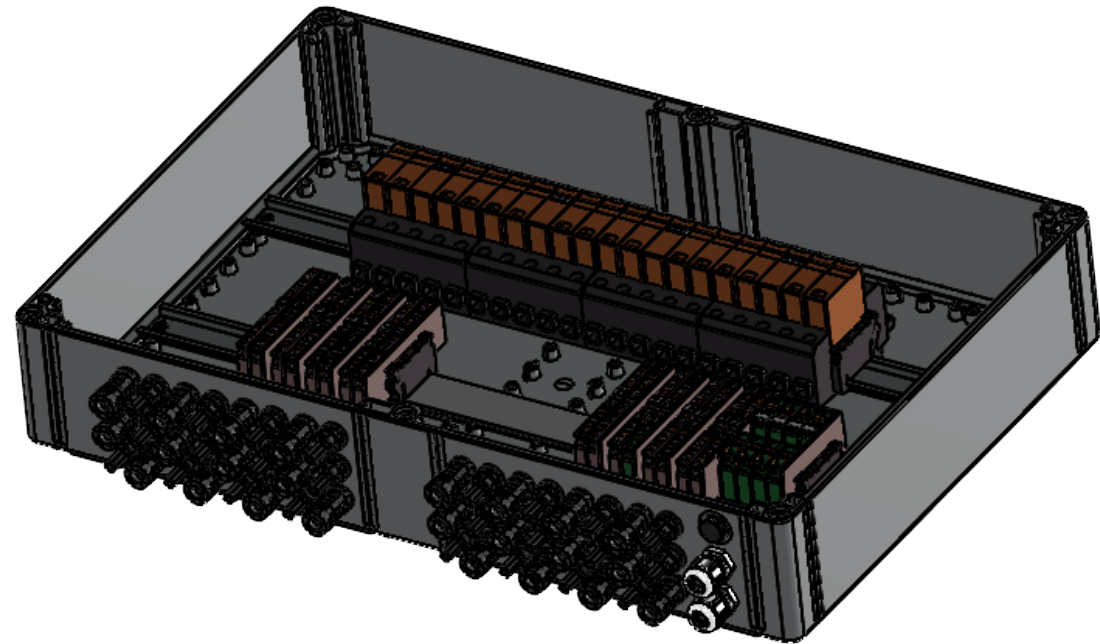
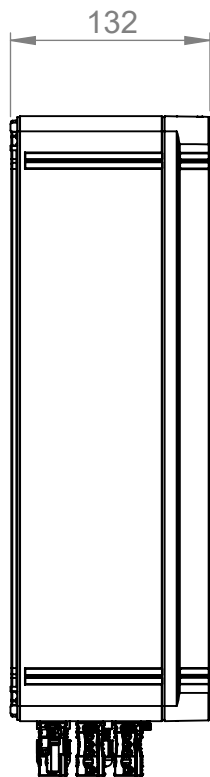
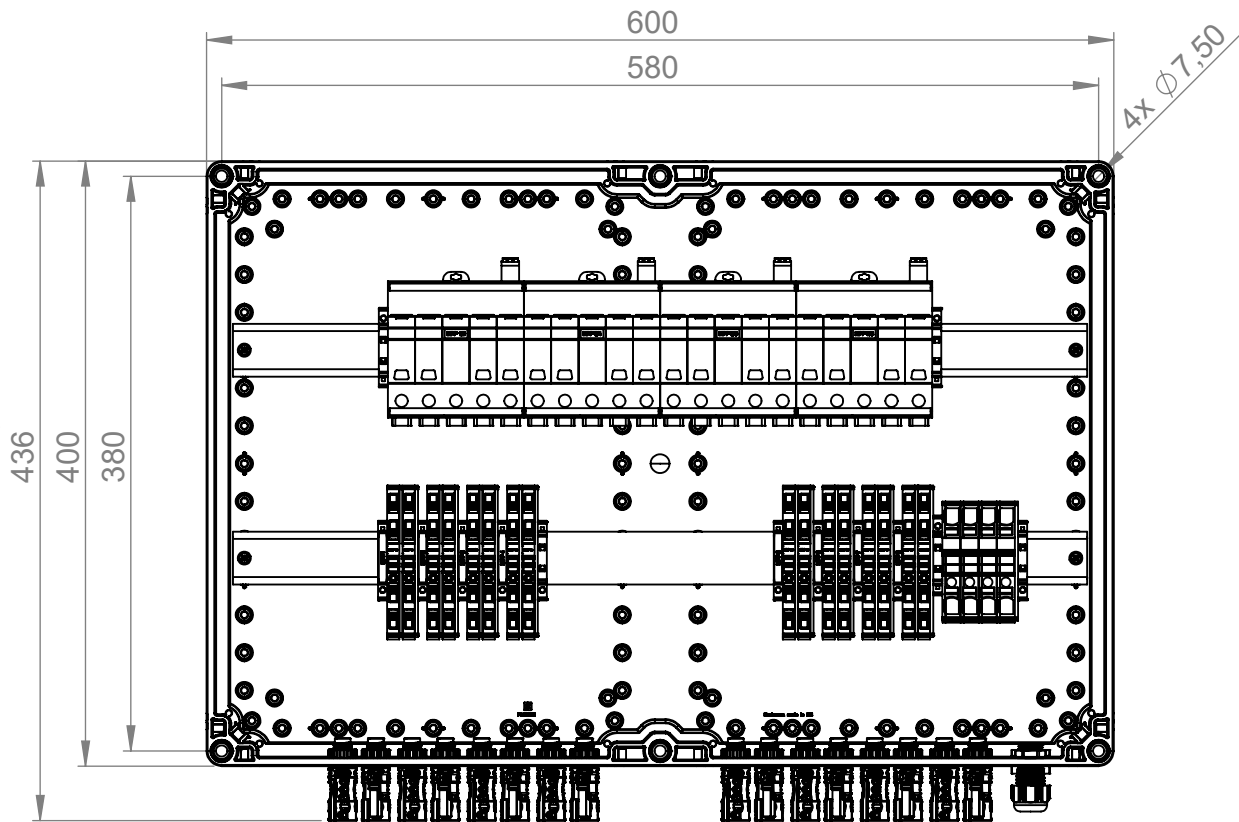


WEITERGABE SOWIE VERVIELFÄLTIGUNG DIESES DOKUMENTS, VERWERTUNG UND MITTEILUNG SEINES INHALTS SIND VERBOTEN, SOWEIT NICHT AUSDRÜCKLICH GESTATET.
ZUWIDERHANDLUNGEN VERPFLICHTEN ZU SCHADENSATZ. ALLE RECHTE FÜR DEN FALL DER PATENT-, GEBRAUCHSMUSTER- ODER GESCHMACKSMUSTERENTRAGUNG VORBEHALTEN.
THE REPRODUCTION, DISTRIBUTION AND UTILISATION OF THIS DOCUMENT AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPLICIT AUTHORIZATION IS PROHIBITED.
OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. WEIDMÜLLER EXCLUSIVELY RESERVES THE RIGHT TO FILE FOR PATENTS, UTILITY MODELS OR DESIGNS.

WEIDMÜLLER INTERFACE GmbH & Co. KG

Material No.	Artikelbeschreibung / Article Description	Beschreibung / Description	Drehmoment / Torque
9535820000	FPC 40/60/13 TRSP	Deckelschraube / Lid Screw	0,8-1,0 Nm
2860620000	VG M16 - K68/15 5-10	Hutmutter / Cap Nut	2-3 Nm

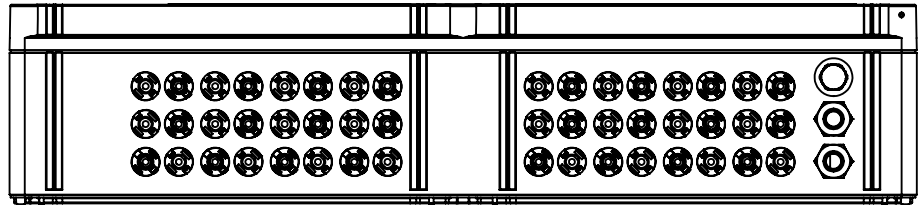

technical details:
Up to 8 MPPT (Maximum Power Point Tracking)
2x DC Input per MPPT
1x DC Output per MPPT

Connection type:
Plug-MC4-EVO2

Surge voltage arrester
PV system voltage max.: 1100V DC
Requirements class: Type I+II
with remote contact

Rated DC voltage (Un): 1100 V
Rated DC current per input (Inc): 41 A
Rated short-time withstand current per input: 1.25 x Inc
Rated total DC current per MPPT (I out max.): 41 A
Operation ambient temperature: -20°C to +50°C
Degree of Protection: IP65, no direct sunlight

Montagefüße im Lieferumfang enthalten/ Mounting feet enclosed

Additional Product Documents				1.		-	Tolerances: ISO 2768-mK		
				2.		-	 		
-	-	-	-		Date	Name	Weidmüller 		
-	-	-	-	Drawn	15.12.2023	wm00504			
-	-	-	-	Checked					
-	-	-	-	Criterion for print					
-	-	-	-	1:5		A3	Description: PVC DC 2I 1O 8MPP SPD1R EVO 11		
-	-	-	-	Customer:					
-	-	-	-	Customer-No:					
-	-	-	-						
-	-	-	-						
Index	Brief Description	Date	Name			Drawing-No / Material-No:		drw Index	Sheet
						8000131765		0	1 / 1
				Customer Description: -					